


# 4-LED LIGHTHEAD

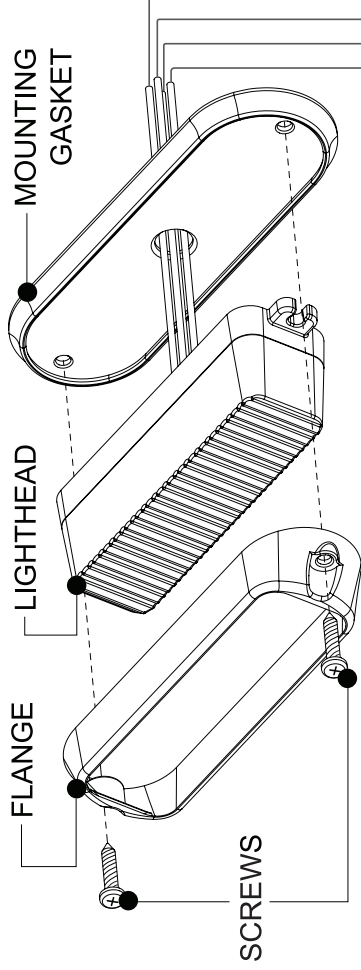

To +VDC (fuse @ 3A) ----- RED

To Chassis Ground ----- BLACK

For Simultaneous or Alternating Flash ----- WHITE

Group1 Heads: (Wiring- WHITE connected to RED) will flash together

Group2 Heads: (Wiring- WHITE not connected to RED) will flash together

\*Group1 Heads will alternate with Group2 Heads\*

For Synchronization & Flash Patterns ----- YELLOW

Connect YELLOW wires of all heads together for synchronization

## FLASH PATTERN

- 0 Random (default)
- 1 Single (split)
- 2 Double (split)
- 3 Quad (split)
- 4 Quint (split)
- 5 Mega (split)
- 6 Ultra (split)
- 7 Single-Quad (split)
- 8 Single H/L (split)
- 9 Single (all)
- 10 Double (all)
- 11 Quad (all)
- 12 Quint (all)
- 13 Mega (all)
- 14 Ultra (all)
- 15 Single-Quad (all)
- 16 Single H/L (all)
- 17 Steady 2 (california)
- 18 Steady 4 (all)

To select Flash Pattern,

apply +VDC to YELLOW wire:

- for less than 1 second for next pattern
- for more than 1 second for previous pattern
- for more than 5 seconds for reset to default