


ST3 Super Thin

3-LED Directional Warning Lamp (Surface Mount)



FEATURES

- 0.35" (9mm) Super low-profile thickness.
- Multi-Voltage Input 12~24VDC
- Built-in 12 selectable flash patterns
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Multi-units synchronization in simultaneous or alternating flash.
- Reverse polarity protection.
- Weatherproof and vibration resistant design for internal or external use.
- Aluminum base for heat dissipation.

SPECIFICATIONS

Meets: SAE J595 Class1 (R,A,B,W) , CA13 Class B (R,B,A)

IP Code: IPX8

Bulb: High-power LED x 3pcs

Warning Patterns: 12 Flash Patterns

Operating Voltage: 12~24VDC

Avg. Current: 0.24A @12VDC / 0.12A @24VDC
(varies with flash pattern)

Avg. Power: 2.9 Watts (varies with flash pattern)

Max. Current: 0.48A @12VDC / 0.24A @24VDC

Max. Power: 5.8 Watts


Wires: Red-Vcc : 26.5cm (20AWG)
Black-GND : 26.5cm (20AWG)
Yellow-Flash Patterns & Sync : 26.5cm (20AWG)

Fuse Recommended: 1A

Multi-Unit Synchronization: Over 15 units

Available in: RED, BLUE, AMBER, WHITE

DIMENSIONS

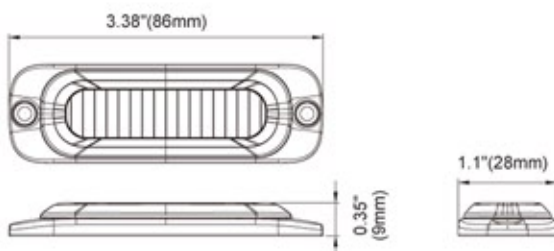

PART NO.

- ST3-A (amber)
- ST3-B (blue)
- ST3-R (red)
- ST3-W (white)

FLASH PATTERN

FP#	Flash Patterns	
1	Random	7 Quad
2	Steady	8 Quint
3	Single	9 8 Flash
4	Mega	10 Single-Quad
5	Double	11 Single H/L
6	Triple	12 Single-Triple-Quint