

# MICRO-BAR-EXD

## Dual Color




### FEATURES

- Multi-Voltage Input 12~24VDC.
- Each unit comes with 6 lighthoods (12 LEDs/head).
- Built-in 24 Selectable Flash Patterns.
- Dual color and dual memory capability.
- LEDs rated to 100,000 hours of operation.
- Non-volatile memory recalls last flash pattern used at power up.
- Available in permanent and magnetic versions.
- Magnetic version comes with suction magnets.
- Water and vibration resistant design for internal or external use.
- Reverse polarity protection.
- Multiple units can be synchronized.


### SPECIFICATIONS

**Meets:** SAE  
**Bulb:** High Intensity LED x 72pcs  
**Warning Patterns:** 24 Flash Patterns  
**Operating Voltage:** 12~24 VDC  
**Avg. Current:** 3A @12VDC / 1.5A @24VDC  
 (varies with flash pattern)  
**Avg. Power:** 36 Watts (varies with flash pattern)  
**Max. Current:** 6A @12VDC / 3A @24VDC  
**Max. Power:** 72 Watts  
**Wires: Magnet Mount**  
 ◦ Dual button cigar-plug: 300cm  
**Permanent Mount**  
 ◦ Red-Vcc: 30cm (18AWG)  
 ◦ Black-GND: 30cm (18AWG)  
 ◦ Blue-Memory, Flash Patterns & Sync: 30cm (18AWG)  
**Fuse Recommended:** 9 Amps  
**Multi-Unit Synchronization:** Over 15 units  
**Colors Available:** Amber, Blue, Red, White  
 (most combinations of the four)

### DIMENSIONS

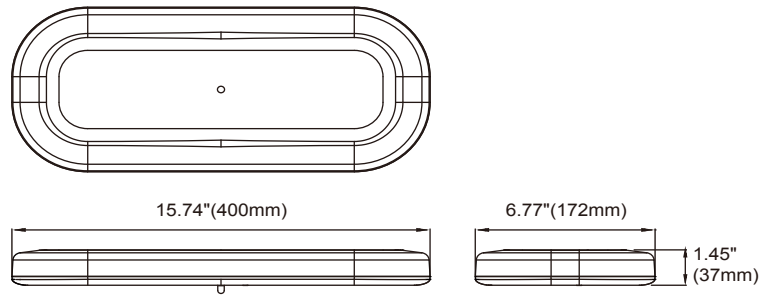

### MOUNTS

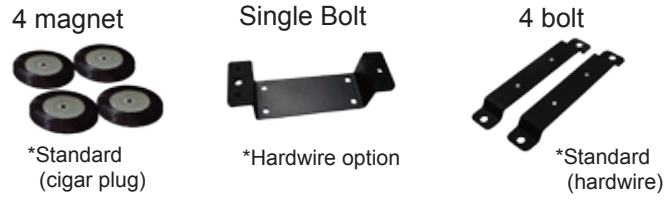

### FLASH PATTERN

FP#	Flash Patterns		
1	Random	13	Double (all) (SAE)
2	Rotating (slow)	14	Quad (all) (SAE)
3	Rotating (fast)	15	Quint (all) (SAE)
4	Single (split)	16	Mega (all)
5	Double (split)	17	Ultra (all) (SAE)
6	Quad (split)	18	Single-Quad (all)
7	Quint (split)	19	Single H/L (all)
8	Mega (split)	20	Steady (half)
9	Ultra (split)	21	Single (2Hz)
10	Single-Quad (split)	22	Double (2Hz)
11	Single H/L (split)	23	Triple (2Hz)
12	Single (all) (SAE)	24	Quad (2Hz)